

# TILTING DITCHING BUCKET

CREATION AND  
MAINTENANCE OF YOUR  
WORKS



## FEATURES:

The tilting ditching bucket range are suitable for mini excavators to 37 ton excavators.

They are fitted with one or two horizontal cylinders depending on their size.

Their tilt is 45 ° on the left and on the right.

## SECURITY

## PERFORMANCE

## ROBUST DESIGN

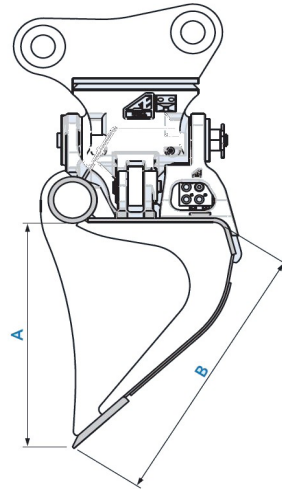
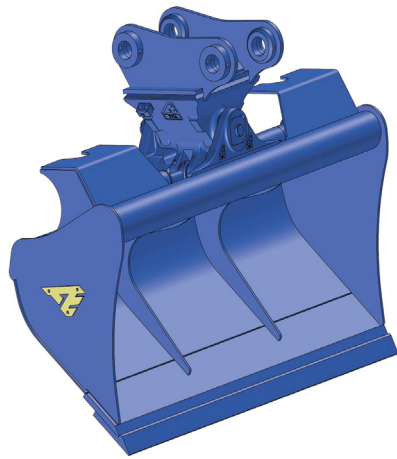
## ADVANTAGES :

- 1 or 2 horizontal cylinders
- 2x45 ° tilt
- Counter blade welded on C31l, C41l, C51l
- Reversible counter blade
- Ideal for highway sloping or for any sloping surfaces




## OPTIONS :

Balancing valve from C22l  
Cylinder protection  
Rear blade

## TECHNICAL DIAGRAMS



## TECHNICAL CHARACTERISTICS

Reference			A	B		Carrier weight
<i>Ref.</i>	<i>mm</i>	<i>Litres</i>	<i>mm</i>	<i>mm</i>	<i>Kg*</i>	<i>t</i>
<b>C05I04</b>	1020	60	280	293	90	1/2.5
<b>C05I04</b>	1220	70	280	293	100	1/2.5
<b>C12I05</b>	1220	90	279	337	129	2.6/3
<b>C12I08</b>	1300	150	372	448	180	3.1/6
<b>C12I08</b>	1400	160	372	448	186	3.1/6
<b>C22I11</b>	1600	250	426	540	316	7/11
<b>C22I11</b>	1800	285	426	540	335	7/11
<b>C31I20</b>	1800	540	633	719	705	12/15
<b>C31I20</b>	2000	600	633	719	755	12/15
<b>C31I25</b>	1800	675	727	782	730	12/15
<b>C31I25</b>	2000	750	727	782	780	12/15
<b>C41I25</b>	1800	680	727	795	850	16/19
<b>C41I25</b>	2000	760	727	795	890	16/19
<b>C41I35</b>	1800	940	894	866	895	16/19
<b>C41I35</b>	2000	1055	894	866	970	16/19
<b>C51I35</b>	2000	1040	886	892	1150	20/26
<b>C51I35</b>	2200	1160	886	892	1210	20/26
<b>C51I40</b>	2000	1190	964	934	1190	20/26
<b>C51I40</b>	2200	1325	964	934	1245	20/26
<b>C51I45</b>	2000	1380	1057	996	1230	20/26
<b>C51I45</b>	2200	1530	1057	996	1290	20/26
<b>C60I40</b>	2400	1360	820	880	1950	27/37
<b>C60I40</b>	2500	1420	820	880	1995	27/37

\*Weight with quick hitch QA