
HOLDER

NO COMPROMISES

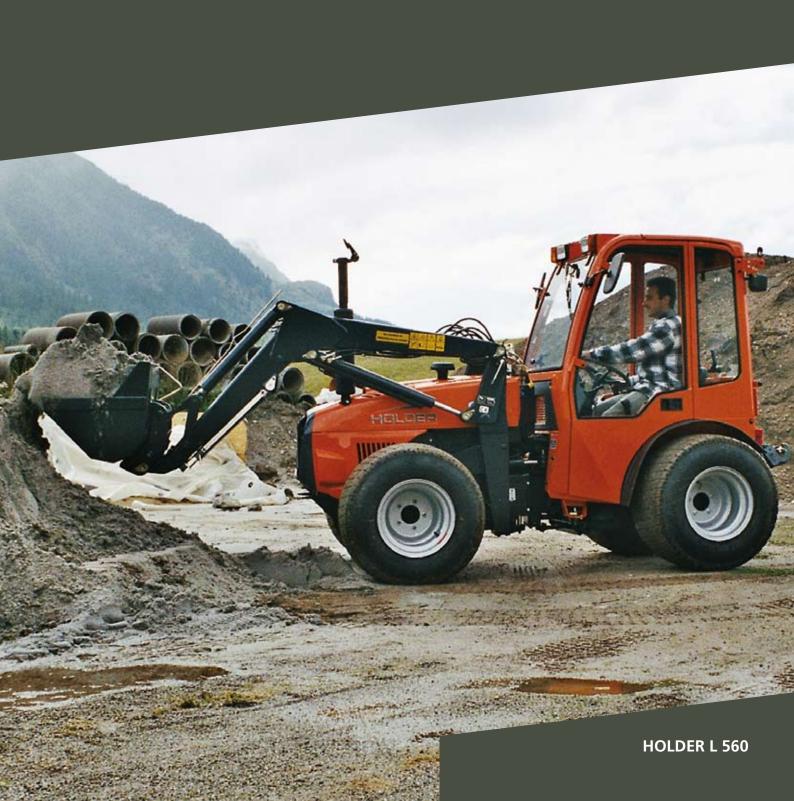

TECHNICAL DATA HOLDER L 560

Characteristics	Engine	Deutz four-stroke diesel
	Power output	45,9 kW (62 HP)
	Cylinders	4
	Cooling	Integrated oil-air cooling
	Air filter	Dry air filter with acoustic warning apparatus
	Tank capacity	51 l
	Drive	12/12 reverse gear unit
	Differential lock	Front and rear, simultaneously electronically switchable, easy to operate with the toggle switch, 100% effective for both axles
	Max. speed	35 km/h
	Power take-offs	load-dependent, independent engine power take-off, front/rear
	Brakes	hydraulically activated wet multi-plate brake/mechanical handbrake
	Steering	Full hydrostatic articulated-frame steering (load-sensing)
	Hydraulic system/pump	14 ccm/U or 37 l/min
	Hydraulic oil quantity	18
	Excavation power, front/rear	700/1.800 kg, KAT IN and KAT I
	Auxiliary control valves	Extensive expansion possibilities designed for the respective usage
	Activated carbon filter and air conditioning	optional
Weight 1	Empty weight	2.009 - 2.215 kg
	Gross vehicle weight	2.800 kg
	Gross axle weight rating, front/rear	1.700 kg
	Coupling load	600 kg
Dimensions	Wheel base	1.752 mm
	Total length with rear three-point hitch	3.309 mm
	Total height with cabin ²	2.006 - 2.075 mm
	Track ²	701 - 1.144 mm
	Narrowest total exterior width ²	1.464 mm
	Load area/platform dimensions	-
	1 incl. driver with 75 kg. depending upon turns and equipmen	2 december 2

 $^{^{1}}$ incl. driver with 75 kg, depending upon tyres and equipment 2 depending upon tyres

FOUR SEASONS, ONE HOLDER

You have the entire portfolio of attachments for year round use at your disposal. Whether sweeping, mowing, suction extraction or clearing, the L 560 is the perfect vehicle for all purposes. The attachments can be changed easily, without tools and safely by a single person. Load-dependent power take-offs with adjustable rotational speeds ensure an enormously high degree of effectiveness with their direct power transmission from the motor to the attachments.



FOR ECONOMIC EFFICIENCY THROUGHOUT THE YEAR

STANDARD HOLDER ADVANTAGES



Versatilit



Articulated-frame steering



Real four-wheel drive



Wheel load balance

((()

Four wheels of equal size

THE MANOEUVRABLE LOADER

With its short front end, the deep-drawn bonnet and the especially narrow total width, the Holder L 560 is not only extremely manoeuvrable; it also offers the best overview for all work.

However, as with all Holder vehicles, the focus here is also on the driver. The comfortable operator's cab with its wide perspective provides an ergonomic workplace that's not missing anything.

Max Holder GmbH

Max-Holder-Straße 1 72555 Metzingen Germany

Telephone: +49 7123 966-0 Fax: +49 7123 966-213

info@max-holder.com www.max-holder.com $\label{thm:consultation} \mbox{Optimal consultation, sales and service from your Holder partner:}$