


# MBB C 3000 S



- The tail lift for safe load handling in the most demanding applications
- 3,000 kg lifting capacity with 1,000 mm load distance
- Extremely robust four-cylinder lifting mechanism
- Available with steel or aluminium platform
- Large selection of special equipment available

## LOAD DIAGRAM

a (mm)	Q (kg)
1,000	3,000
1,200	2,500
1,500	2,000
1,800	1,650
2,400	1,250



# DIE UNVERWÜSTLICHE MIT 3000 KG TRAGKRAFT

## WEIGHTS

Aluminium platform type

Platform width (mm) 2,500

Platform height (mm)

2,050 720 kg


2,400 802 kg

Steel platform type

Platform width (mm) 2500

Platform height (mm)

2,409 980 kg

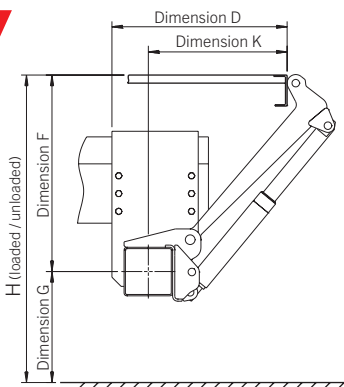

## DIMENSIONS

Lifting arm lengths (mm)	900	1,000
H (max.) loading height, unloaded	1,554	1,748
H (min.) loading height, loaded	1,030	1,180
F (max.) middle of main beam to upper edge of loading floor	924	1,027
K (min.) at dimension F (max.)	652	679
D (min.) installation dimension, minimum	807	834
F (min.)	645	795
K (max.) at dimension F (min.)	901	922
D (max.) installation dimension, maximum	1,056	1,077

## TECHNICAL DATA

Type	MBB C 3000 S
Lifting capacity	3,000 kg
Main beam	190 x 190 mm
Lifting gear hydraulics	2 lifting cylinders / 2 tilting cylinders
Platform overlap with floor	-72 mm
Lifting arm pitch	1,300 mm
Load centre, longitudinal	1,000 mm 1,000 mm
Load centre, across centre	Central, 50% of rated load on one side
Inclination angle of the platform	+90° to -10°

Some of the tail lifts pictured feature special customer-specific equipment. Country-specific regulations must be considered for the tail lift installation. Dimensions may vary. Subject to technical changes, errors and translation mistakes.